
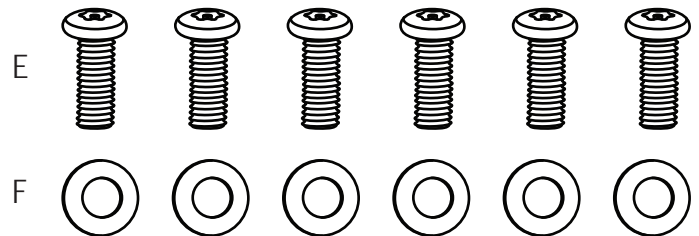
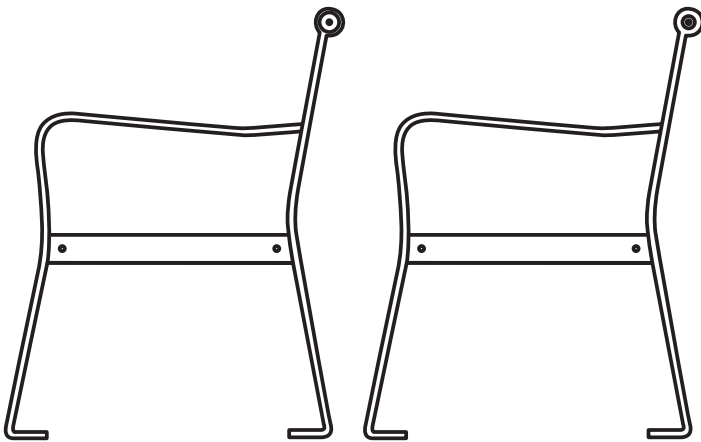




STEEL OUTDOOR BENCH WITH CURVED BACK

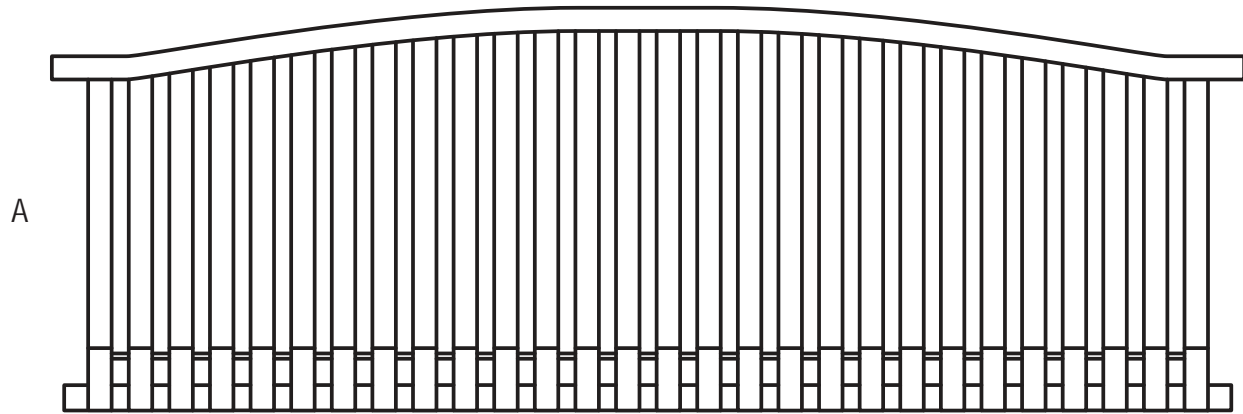

BEFORE ASSEMBLY, PLEASE MAKE SURE ALL COMPONENTS ARE INCLUDED


- A (1) SEAT ASSEMBLY
- B (1) SUPPORT BAR
- C (1) RIGHT END FRAME
- D (1) LEFT END FRAME

- E (6) STAINLESS STEEL TORX BOLTS
- F (6) STAINLESS STEEL WASHERS
- G (1) SECURITY TORX WRENCH

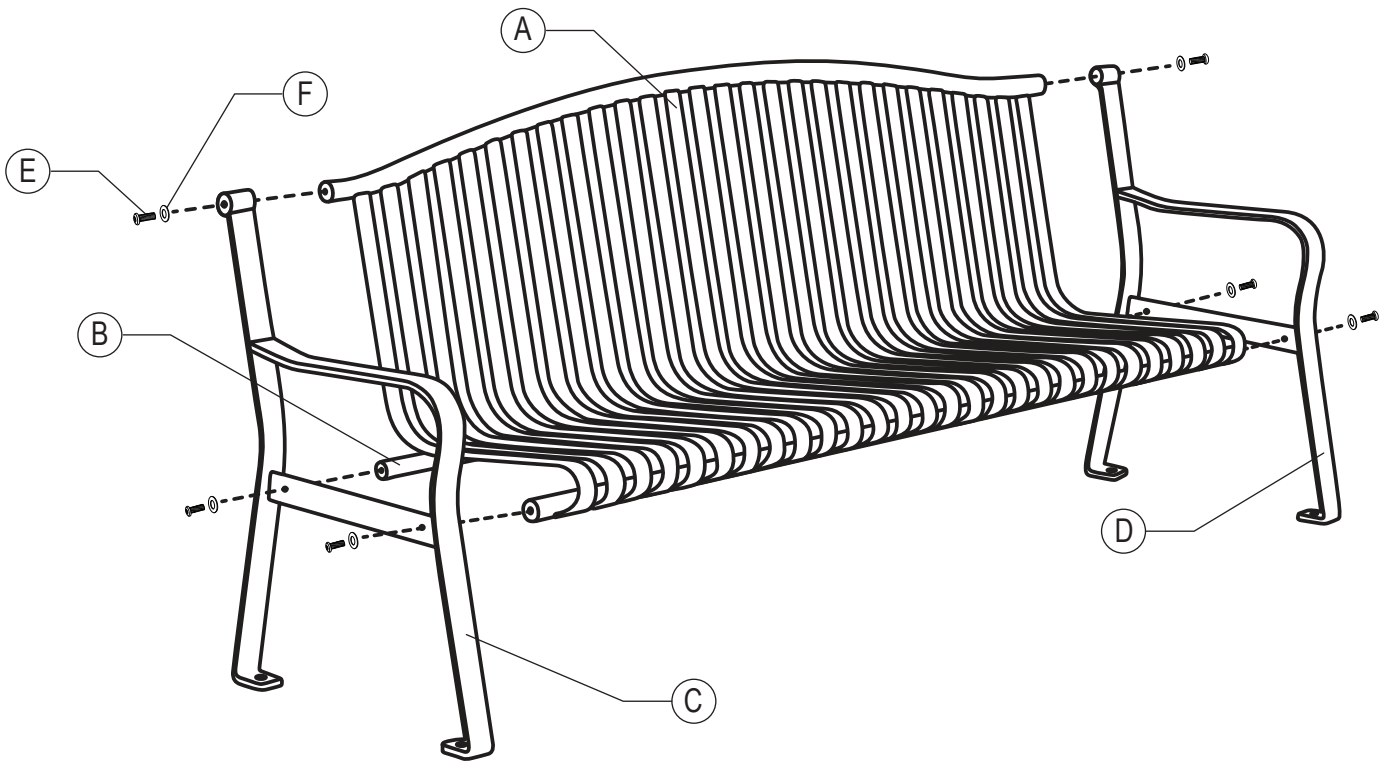

Make sure to assemble the bench on a soft mat to prevent scratching of the product's surface.

DURING ASSEMBLY, DO NOT TIGHTEN BOLTS COMPLETELY.

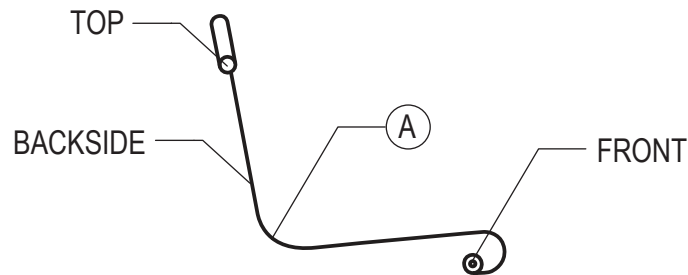

- Step 1: Start by positioning the seat assembly (A) on its backside for ease of assembly.
- Step 2: Slide the upper sleeve of the end frame (C) over the backrest extension (A). Insert one torx bolt (E) with washer (F) into the pre-drilled hole at the top of the end frame to hold securely, but do not tighten. Raise the seat assembly (A) up to align the holes with the front of the end frame (C) and attach the end frame to the seat using one torx bolt (E) and washer (F), do not tighten bolt completely.
- Step 3: Repeat Step 2 on other side of the bench using end frame (D), but do not tighten bolts completely yet.
- Step 4: Place the support bar (B) under the seat assembly between the end frames, and align it with the pre-drilled holes in the back of each end frame. Screw in remaining bolts enough to hold securely, but do not tighten.
- Step 5: Position the bench upright and carefully adjust the components to make sure that the bench is square and level. Finally, tighten the bolts to a snug fit.